

# DESIGN SMART ENERGY METER AND SMART APPLIANCE CONTROL SYSTEM

**\*Mayank Sehdev, \*\*Keshav Gupta**

*\*Aquavit Ceramics Pvt Ltd. \*\*Modern School*

---

## ABSTRACT

*Electricity plays an important role in daily life. Power consumption in India has increased by three times since 2000. In 2014, Indian household consumed about 90 units (kWh) of electricity per month on an average; enough to run four tube-lights, four ceiling fans, a television, a small refrigerator, and small kitchen appliances with specific use hours and efficiency level in India.*

*The IoT is comprised of smart machines interacting and communicating with other machines, objects, environments, and infrastructures. The foremost objective of this device is how we can utilize the power using IoT over a period of time. This project used a tool known as Node-RED. This project extends the design and implementation of an energy monitoring system. This system also has an advantage in which a user can understand and control the power consumed by the electrical appliances on the day to day life.*

*The electricity company gives the information regarding the bill amount, payment and the pre-planned power shut down details to the consumer. So according to the information customer needs to pay. If the customer fails to pay the bill then automatically an alert message will be sent then power is disconnected from the remote server. So in this proposed system it automatically do all the work using a tool Node-Red with the help of IoT.*

## INTRODUCTION

We can define an instrument called Watt hour meter that is used by consumers to measure the amount of electrical energy used by them. Utilities install these instruments at every place like homes, industries, organizations to change the electricity consumption by load such as lights, fans and other appliances. Basic unit of power is watts. One thousand watts is one kilowatt. If we use one kilo watt in one hour, it is considered as one unit of energy consumed. These meters measure the instantaneous voltage and currents,

calculate its product and give instantaneous power. The power is integrated over a period which gives the energy utilized over that time period.

The device use to control home appliances using relay system, same time it can calculate apparent power of system, the system based on IoT (internet of things). The IoT links physical links such as weather sensors and smartphone, to applications. The connections allow applications to provide functionality based on the information it can drive from the things that are connected. IoT has applications across many industries, including government, insurance, energy and smart homes, the system based in Node-RED (flow-based programming for internet of things), where Node-RED is a tool that is used to develop applications and gateways on IBM IoT platform. The system can control home appliances and calculate real time apparent power with raspberry pi based HMI device, same time is provide functionalities to control devices using mobile phones or other computers, connected with same router of WIFI system. The idea of working on this project to design smart energy meter and smart appliance control system, the software of system based on Node-RED a flow- based development tool developed originally by IBM for wiring together hardware devices, APIs and online services as a part of internet of things and other hand arduino programming used to calculate power where CT-sensor connected and use to get raw data and pass through serial communication.

## PROPOSED SYSTEM

This proposed system is quite efficient as it decreases the need of labor and it is a cost efficient as well as it is a time saving process. This device uses relay system which can control home devices. This proposed system allows applications to provide functionality based on the information it can drive from the things that are connected. As it is based on IoT, so it allows us to control home devices using mobile phone only.

## DEVICE DESCRIPTION

The main components that was used for this system are Arduino UNO, Wi-Fi module ESP8266-01, current transformer (CT), potential transformer (PT), voltage regulator AMS1117, and one 16x2 LCD display. The tool that was used is Node-RED and later on the programming part was done in Arduino IDE.

Functional block diagram of the developed smart energy meter is shown in Fig.


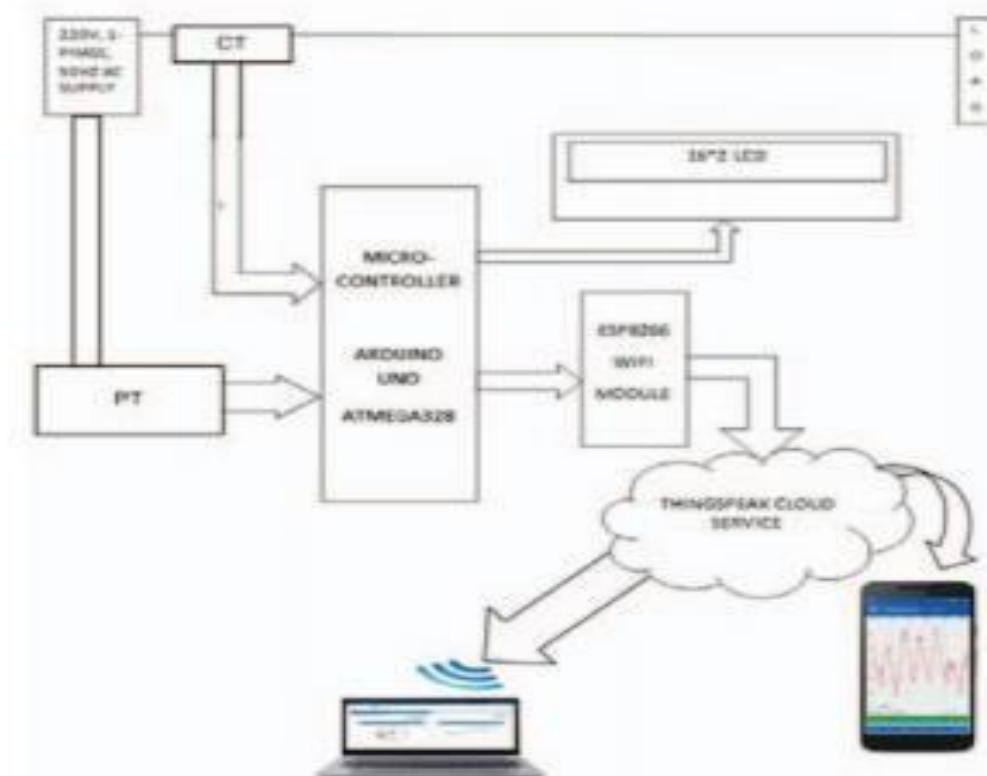


Fig. 1. Functional block diagram of the developed IoT based smart energy meter.

## HARDWARE AND SOFTWARE DESCRIPTION

The Arduino analog input pins were used here. They are used here after being stepped down by CT and PT to collect the line current and line voltage data. Output current of the CT was made to flow through a fixed value. Suitable value of DC offset is added to those signals so that they can be brought within the measurable range of 0-5 V in the Arduino. Values after scaling down the input voltage and current were calculated and locally displayed on the 16x2 LCD and were updated on a time loop. The WiFi module ESP8266-01 was connected to the router for internet access so that the module could successfully send all relevant data to the IoT platform once it is secured.

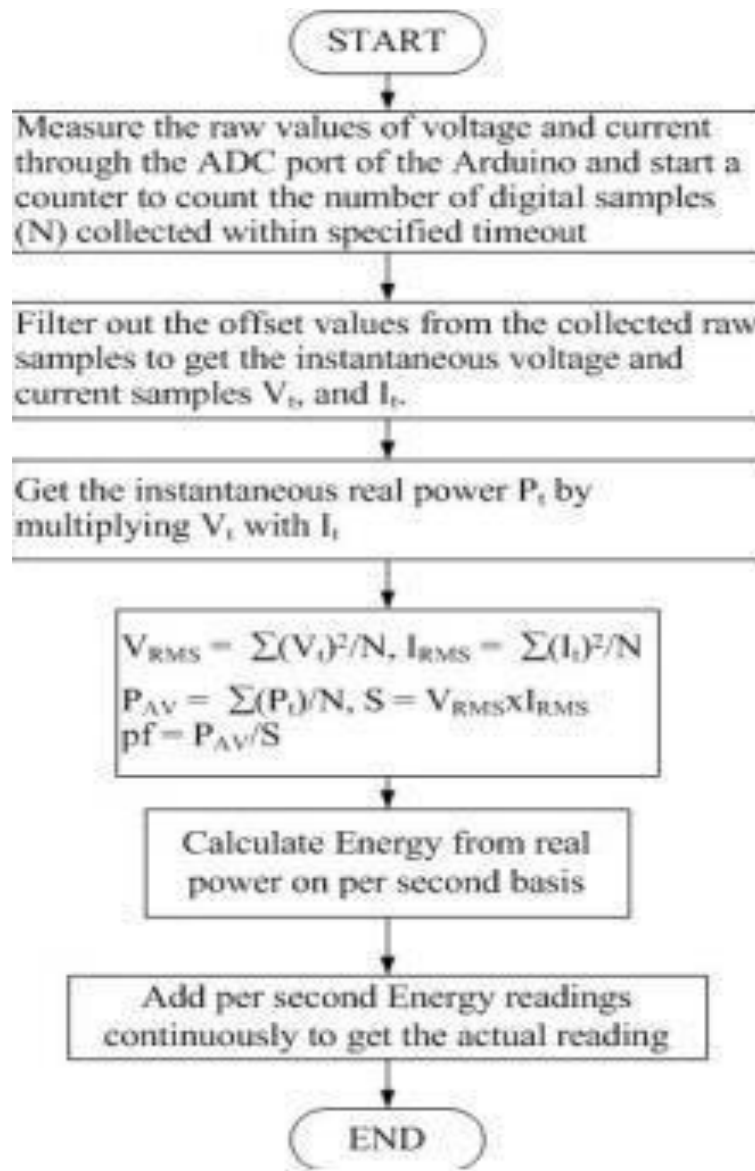


Flow chart for computation of electrical parameters from measured raw signals

#### 1. Arduino IDE

It is used to write and run programs to compatible boards and also with the help of vendor development boards.

Integration of software with hardware is backbone of such a “smart” device. Flowchart depicting the working process of a smart meter in which the device is connected to internet so it collects the data, evaluates the parameters and displays the results. Flowchart of connection that is to be made with the IoT channel is also shown.

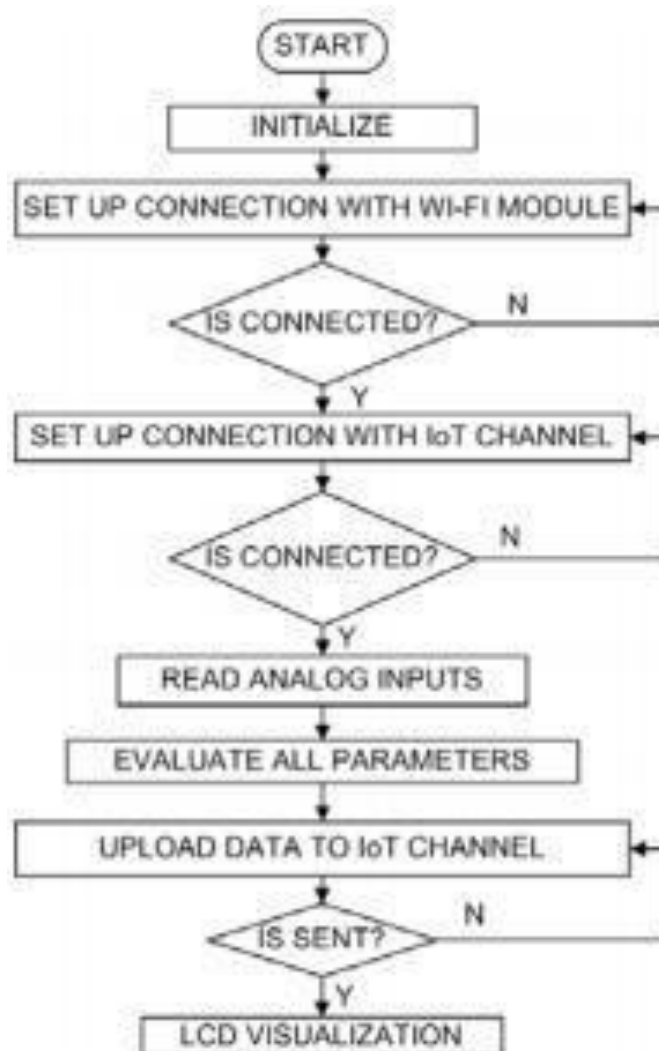

## 2. Wi-Fi module ESP8266-01

The ESP8266 WiFi Module is a protocol stack that is integrated with TCP/IP, that can allow access of wifi network to any microcontroller. We can load different firmwares to make your own application on the modules' memory and processor like At commands firmware. It's a very economic module and has a huge and growing community support.

It has 80Mhz low power 32 bit processor. It means without any external controller we can host some webpages.

The ESP8266 also supports co-existence bluetooth interfaces.

### 3. Current transformer (CT)

We can define current transformer (CT) as a type of transformer that can multiply the alternating current or reduce the alternating current. What it does is, in its secondary coil it produces current proportional to the current present in its primary coil.

Here we define the instrument transformer as potential and current transformer. It changes the high values of current or voltage to small that means it protects the circuit from high current or voltage.

### 4. Potential Transformer (PT)

We can define potential transformer as an instrument that can be used to change / transform higher value voltage to the lower value voltage. To easily measure the voltage values it steps down the high voltage to a safe value. Like wattmeter and watt-hour meters, etc are low voltage measuring instruments.

To keep magnetizing current small it is made with high quality core so that it'll have low flux density. It should be designed such as the voltage ratio variation with load and phase shift between the output voltage and input voltage should be minimum.

The primary and secondary winding have a large number of turns and much small number of turns respectively. The insulation cost is also reduced by dividing the primary winding into the sections which reduced the insulation between the layers.

### 5. Voltage regulator AMS1117

The AMS1117 series of adjustable and fixed voltage regulators are designed to provide up to 1A output current.

Its applications are

- High Efficiency Linear Regulators
- Post Regulators for Switching Supplies
- Battery Chargers
- Active SCSI Terminators
- Power Management for Notebook
- Battery Powered Instrumentation

### 6. 16x2 LCD display

Nowadays, we always use the devices which are made up of LCDs such as CD players, DVD players, digital watches, computers, etc. These are commonly used in the screen industries to

replace the utilization of CRTs. Cathode Ray Tubes use huge power when compared with LCDs, and CRTs heavier as well as bigger. These devices are thinner as well power consumption is extremely less. The LCD 16×2 working principle is, it blocks the light rather than dissipate.

The term LCD stands for liquid crystal display. The main benefits of using this module are inexpensive; simply programmable, animations, and there are no limitations for displaying custom characters, special and even animations, etc.

## CONCLUSIONS AND FUTURE SCOPE

An IoT based smart energy meter will be developed using the software of system based on node-RED. It has the following features:


- Through internet the data management system collects data which will provide the user energy usage information.
- It will work in real time as all the data are connected to internet.
- The android app directly connects the user to the energy management. Thus each and every consumer becomes the contributor to the efficient energy management.
- Since it includes cloud service so it's more secured.
- Bill can be processed without any delay because human involvement will be limited.
- Transparency will be there.
- The components used will be robust and modern updated ones, accuracy is guaranteed.

This smart meter can be very effectively used as one of the major components of a smart grid. In addition to being used for cyber security related studies, the developed device can have some immediate future advancement possible:

- It can be enhanced for power theft detection using IOT.
- The Android application can be used for online payment of bill.
- Load analysis of single entity is performed in the proposed method. Also it can be boosted for area wise load analysis which will help for load forecasting in future.
- There can be an option for prepayment that can be added with the model to develop pre-paid energy meters.

## RESULTS

Once the device is ready, the user has to follow certain steps as detailed in the flowchart for displaying the records in a browser over internet. The IoT platform ThingSpeak is used to collect and store data in the cloud and develop further IoT applications.

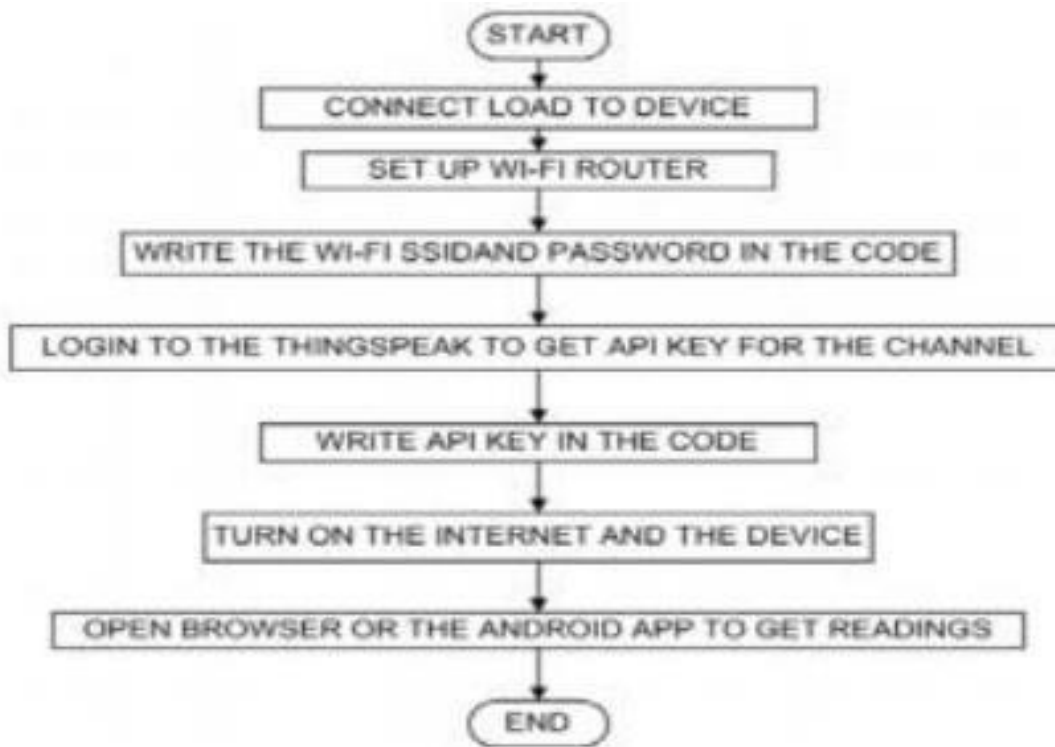

## REFERENCES

- Al-Sakib Khan Pathan, " The State of the Art in Intrusion Prevention and Detection ", CRC Press, Taylor & Francis, USA, 2016
- G. N. Sorebo and M. C. Echols, "Smart Grid Security: An End-to-End View of Security in the New Electrical Grid", Boca Raton, FL, USA: CRC Press, 2011.
- J. Wood and B. F. Wollenberg, "Power Generation, Operation, and Control. Hoboken", NJ, USA: Wiley, 2012.
- S. Visalatchi and K. Kamal Sandeep, "Smart energy metering and power theft control using arduino & GSM", Institute of Electrical and Electronics Engineers (IEEE), 2017.
- Gobhinath.S, Gunasundari.N and Gowthami.P, "Internet of Things (IoT) Based Energy Meter", International Research Journal of Engineering and Technology (IRJET), 2016.
- J. Jose K, L. Mohan, Nijeesh U K, T. C. Benny, "Smart energy meter", International Journal of Engineering Trends and Technology (IJETT), Vol. 22, No. 4, 2015, pp. 179 - 182.